

P4 S7 Banner Full Color

Outdoor

Description:

Full Color P4 S7 outdoor banner in a small and compact chassis. Great visibility, resistance and versatility


Possibility of infinite content: texts, videos, time, images with transitions, content programming, etc. Is ideal for advertising products or offers

Remote control through the Cosmi server. Wifi, 3G / 4G, brightness sensor and optional temperature sensor.





* Exposure image

Outstanding Features:



Measures:

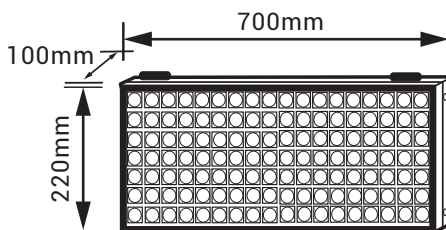

Technical specifications:

LED	SMD
Pitch	4mm
Resolution	160*40px/cabinet
Brightness	±5.000/ 5.500nits
View distance	≥4m
Viewing angle	140°H / 130°V
Maximum consumption	≤90w
Average consumption	± 30w
Working voltage	AC200-230V
Chassis / IP Grade	Metal / Front: IP65 / Rear: IP54
Opening	Front.Upwards
Scanning	1/10
Double sided	No
Working temp.	-20° / +45°
Working humidity	10-90%
software	Included. Multilanguage
Connectivity	TCP / IP (network cable), USB memory .3G / 4G WIFI. Optional Cosmi Server
Weight	±Kg net / 12Kg + packaging
Measures with packaging	-
Gray Scale	14-16Bits

Ref. 290274

Learn more:



Warranty | According to Spanish law

Observations

Mandatory horizontal mounting, when installation is outdoors.


* There must be a gap of at least 80mm around it to open



Annotations

cabin banner P4

Outdoor / S7

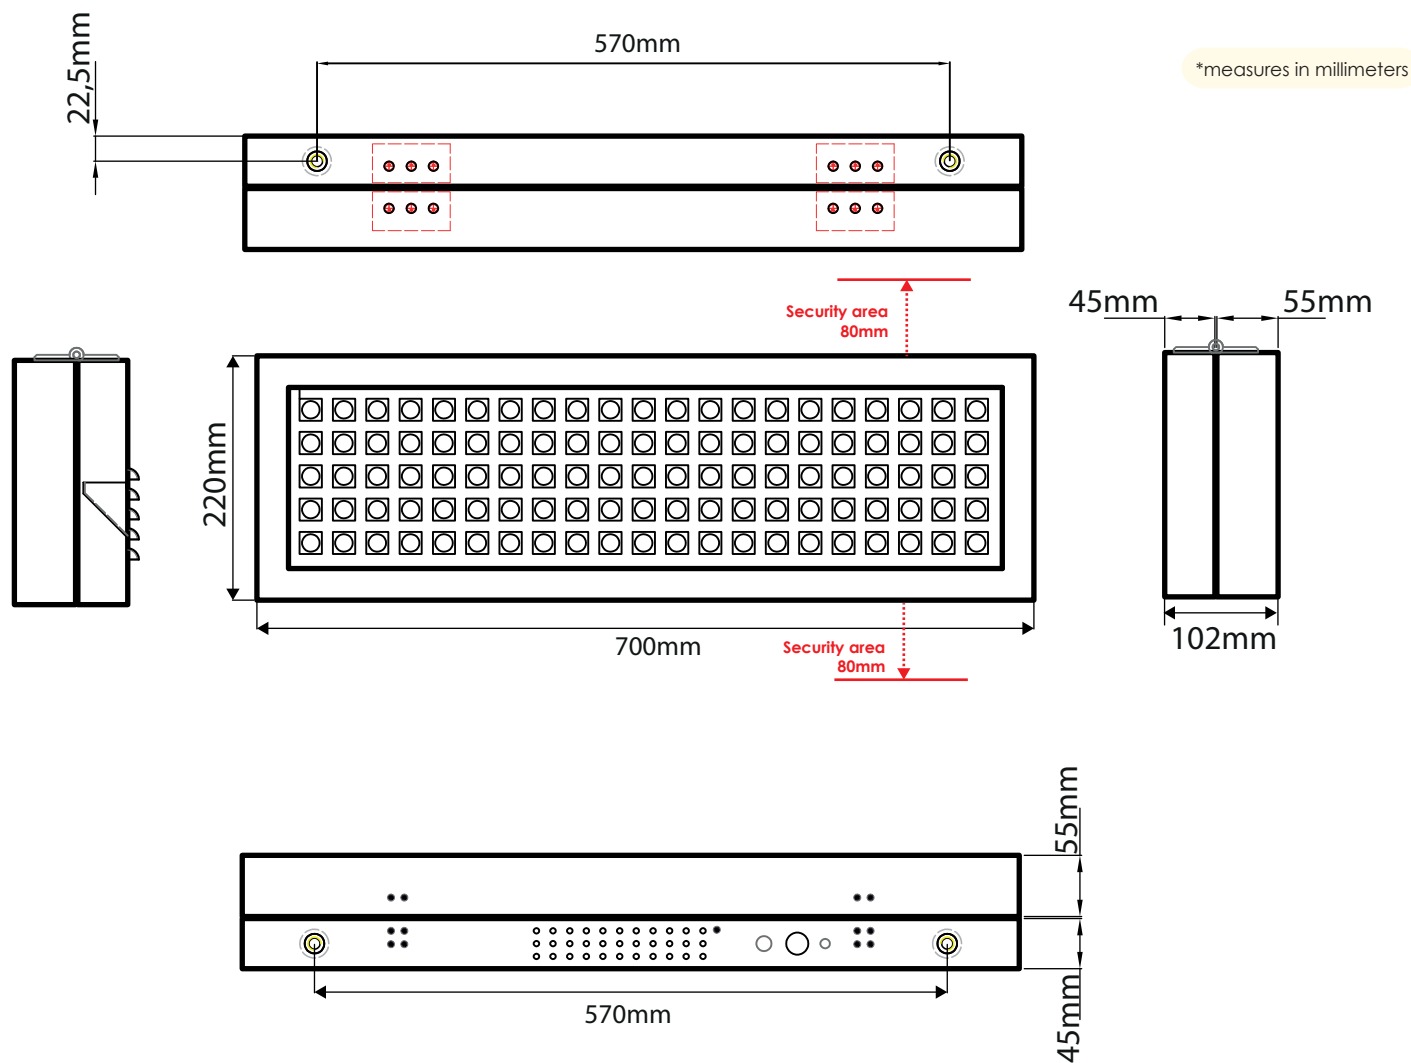

Observations:

- There shouldn't be any deformations on the surface where the screen will be installed
- Avoid blows that could damage the chassis or the LED boards
- When leaving the screen on the ground: first support the rear of the chassis and then the front
- Is not allowed the obstruction of the air inlets and outlets of the chassis
- Perforations or deformations that may affect the inside of the screen are not allowed
- Mandatory horizontal mounting, when the installation is outdoors
- Installation is only allowed at a maximum inclination of 15° towards the front or back.
- When installing, a gap of at least 80mm must be left

